


Internal workorder - Ceypar - PC/ABS KCA zwart			
Property	Measured Value	Unit	Test method
Melt flow ratio (260 °C/5 kg)	31,8	g/10 min	ISO 1133
IZOD impact (notched, 23 °C)	38,2	kJ/m ²	ISO 180/ 1A
FTIR	PASS	n.a.	Internal method
XRF	PASS	PPM	Internal method

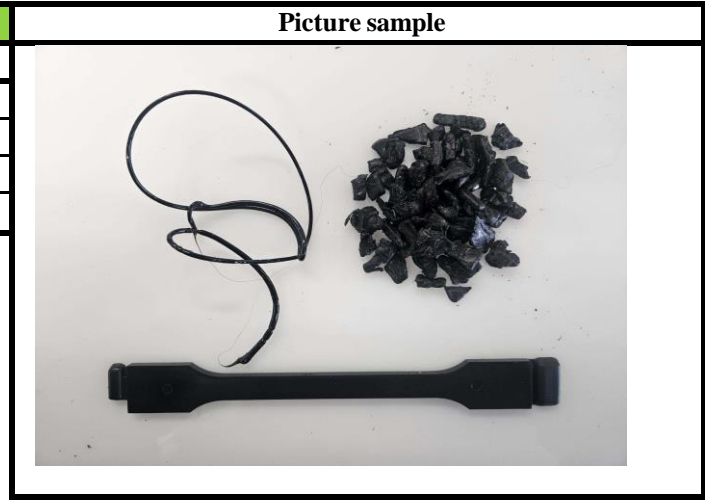

Comments
The sample is coarsely ground.

Workorder number:	DMWO-0250
Date completed:	16-1-2026
responsible:	D.Geers

Numune kaba bir şekilde öğütülmüştür.