


Company - Ceypar - PC black / claer			
Property	Measured Value	Unit	Test method
Melt flow ratio (300 °C/1,2 kg)	27,3	g/10 min	ISO 1133
IZOD impact (notched, 23 °C)	7,9	kJ/m ²	ISO 180/ 1A
FTIR	PASS	n.a.	Internal method
XRF	PASS	PPM	Internal method

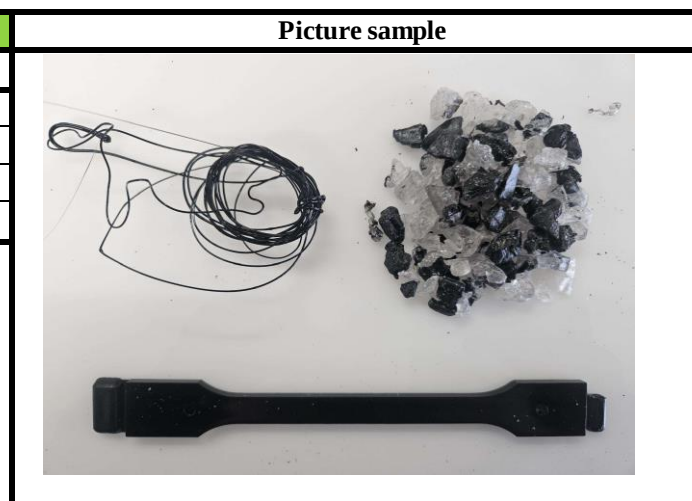

Comments
The sample is coarsely ground.

Work order number:	393417
Completion date:	16-06-2026
Responsible person:	S. Tacchini