


Art. 009506
HDPE SERB MAC LAV –
Regrind and washed car fuel tanks

Color	Black
Packaging	Big Bags
Form	Flakes $\phi \leq 16$ mm
Use	Extrusion
Source	Post consumer

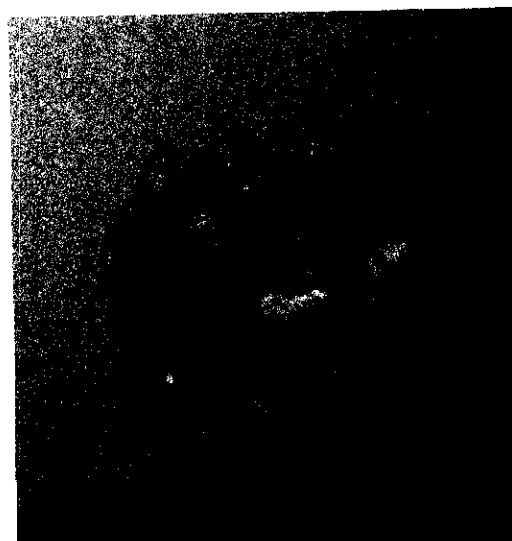

Parameters	Test Method	Test Result	Tolerance range in compliance UNI 10667 standard	Unit
Melt flow rate (MFR)	ISO 1133 (190°C/5 kg)	0,4	+/- 20%	g/10 min
Specific Density	ISO 1183 - 1	4	Grade 1: 0,915 a 0,925 Grade 2: 0,926 a 0,935 Grade 3: 0,936 a 0,945 Grade 4: 0,946 a 0,960 Grade 5: >0,960	g/cm ³
Melt temperature	DSC	140	$\pm 3^{\circ}\text{C}$	($^{\circ}\text{C}$)
PE Presence	DSC	Positive	80%	%

In compliance with UNI 10667-2

Date

Signature