


Technical Data Sheet (TDS)

Regranulat



Product Description:

PP (6810) copolymer black granules are coming from our Post Consumer regrind which is suitable for lightweight production and enhances properties for common use. The material is available in standard black RAL9004.

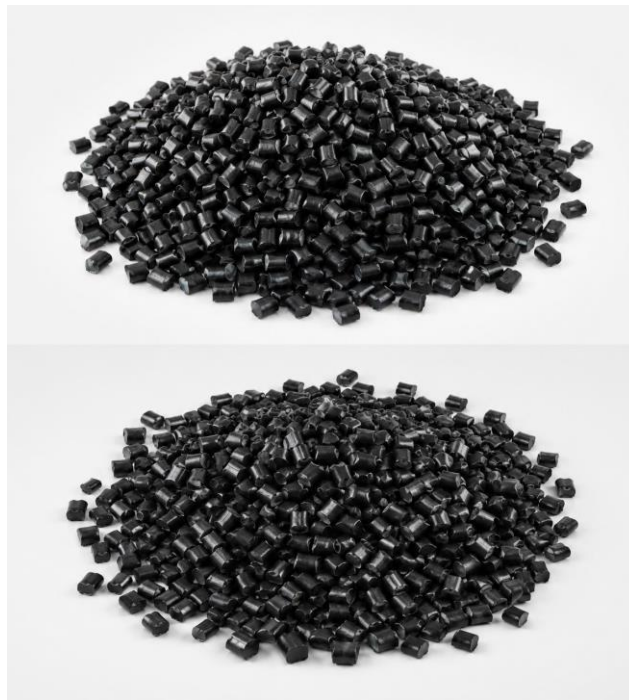

Technical Properties and processing Parameters:

Properties	Test Method	Test Conditions	Units	Typical Values
Melt Flow Rate	ISO1133	230°C/2,16kg	g/10min	6 -10
Specific Gravity	ISO1183	23°C	g/cm	0,90 -0,93
Charpy Un-notched Impact	ISO179	23°C	[kJ/m2]	8-9
Ash Contant				<= 2%

Wenhua GmbH,
Auf der Platte 5, 94315 Straubing
Tel.: +49 9421 8613 813
Mobil.: +49 1601876349
@: lina@wenhua-kunststoffgranulate.com

Tested: Ms Xu
Date: 28.05.2026

Wenhua GmbH,
Auf der Platte 5, 94315 Straubing
Tel.: +49 9421 8613 813
Mobil.: +49 1601876349
@: [lina@wenhua-
kunststoffgranulate.com](mailto:lina@wenhua-kunststoffgranulate.com)

Tested: Ms Xu
Date: 28.05.2026