

Rynite® 530HTE NC010

THERMOPLASTIC POLYESTER RESIN

Common features of Rynite® thermoplastic polyester include mechanical and physical properties such as excellent balance of strength and stiffness, dimensional stability, creep resistance, heat resistance, high surface gloss and good inherent electrical properties at elevated temperature. It can be processed over a broad temperature range and has excellent flow properties.

Rynite® thermoplastic polyester resins are typically used in demanding applications in the automotive, electrical and electronics, appliances where they successfully replace metals and thermosets, as well as other thermoplastic polymers.

Rynite® 530HTE NC010 is a 30% glass reinforced modified polyethylene terephthalate resin with excellent high temperature dielectric properties.

Product information

Resin Identification	PET-GF30	ISO 1043
Part Marking Code	>PET-GF30<	ISO 11469

Rheological properties

Melt mass-flow rate	9 g/10min	ISO 1133
Melt mass-flow rate, Temperature	280 °C	ISO 1133
Melt mass-flow rate, Load	2.16 kg	ISO 1133
Molding shrinkage, parallel	0.1 %	ISO 294-4, 2577
Molding shrinkage, normal	0.6 %	ISO 294-4, 2577

Typical mechanical properties

Tensile Modulus	11000 MPa	ISO 527-1/-2
Stress at break	160 MPa	ISO 527-1/-2
Strain at break	1.9 %	ISO 527-1/-2
Charpy impact strength, 73°F	38 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 73°F	10.5 kJ/m ²	ISO 179/1eA
Poisson's ratio	0.34	

Thermal properties

Melting temperature, 18°F/min	252 °C	ISO 11357-1/-3
Glass transition temperature, 18°F/min	90 °C	ISO 11357-1/-3
Temp. of deflection under load, 260 psi	230 °C	ISO 75-1/-2
Coeff. of linear therm. expansion, parallel, -40-23°C	21 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, parallel	21 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, parallel, 55-160°C	18 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal, -40-23°C	56 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	63 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal, 55-160°C	112 E-6/K	ISO 11359-1/-2
Thermal conductivity of melt	0.29 W/(m K)	ISO 22007-2

Rynite® 530HTE NC010

THERMOPLASTIC POLYESTER RESIN

Spec. heat capacity of melt	1500 J/(kg K)	
RTI, electrical, 30mil	140 °C	UL 746B
RTI, electrical, 60mil	140 °C	UL 746B
RTI, electrical, 120mil	140 °C	UL 746B
RTI, impact, 30mil	140 °C	UL 746B
RTI, impact, 60mil	140 °C	UL 746B
RTI, impact, 120mil	140 °C	UL 746B
RTI, strength, 30mil	140 °C	UL 746B
RTI, strength, 60mil	140 °C	UL 746B
RTI, strength, 120mil	140 °C	UL 746B

Flammability

Burning Behav. at thickness h	HB class	IEC 60695-11-10
Thickness tested	0.85 mm	IEC 60695-11-10
UL recognition	yes	UL 94
Glow Wire Flammability Index, 120mil	800 °C	IEC 60695-2-12
Glow Wire Ignition Temperature, 120mil	800 °C	IEC 60695-2-13
FMVSS Class	B	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	36 mm/min	ISO 3795 (FMVSS 302)

Electrical properties

Relative permittivity, 100Hz	4.2	IEC 62631-2-1
Relative permittivity, 1MHz	3.9	IEC 62631-2-1
Dissipation factor, 100Hz	14 E-4	IEC 62631-2-1
Dissipation factor, 1MHz	146 E-4	IEC 62631-2-1
Volume resistivity	>1E13 Ohm.m	IEC 62631-3-1
Surface resistivity	1E14 Ohm	IEC 62631-3-2
Electric strength	38 kV/mm	IEC 60243-1
Comparative tracking index	200	IEC 60112

Other properties

Density	1560 kg/m³	ISO 1183
Density of melt	1360 kg/m³	

Injection

Drying Recommended	yes
Drying Temperature	120 °C
Drying Time, Dehumidified Dryer	4 - 6 h
Processing Moisture Content	≤0.02 ^[1] %
Melt Temperature Optimum	285 °C
Min. melt temperature	280 °C
Max. melt temperature	300 °C
Max. screw tangential speed	0.2 m/s
Mold Temperature Optimum	140 °C

Rynite® 530HTE NC010

THERMOPLASTIC POLYESTER RESIN

Min. mold temperature	120 °C
Max. mold temperature	140 ^[2] °C
Hold pressure range	≥80 MPa
Hold pressure time	4 s/mm
Back pressure	As low as possible MPa
Ejection temperature	170 °C
[1]: At levels above 0.02%, strength and toughness will decrease, even though parts may not exhibit surface defects.	
[2]: (6mm - 1mm thickness)	

Additional information


Injection molding

When lower mold temperatures are used, the initial warpage and shrinkage will be lower, but the surface appearance will be poorer and the dimensional change may be greater when parts are subsequently heated.

Rynite® 530HTE NC010

THERMOPLASTIC POLYESTER RESIN


Viscosity-shear rate

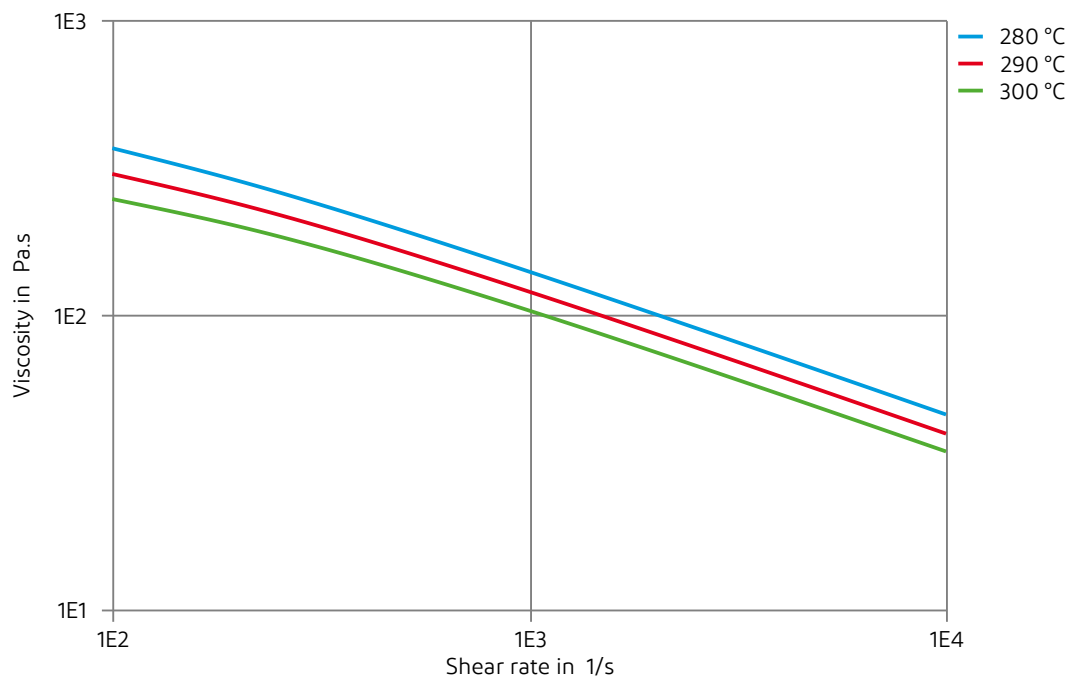

Rynite® 530HTE NC010

THERMOPLASTIC POLYESTER RESIN


Shearstress-shear rate

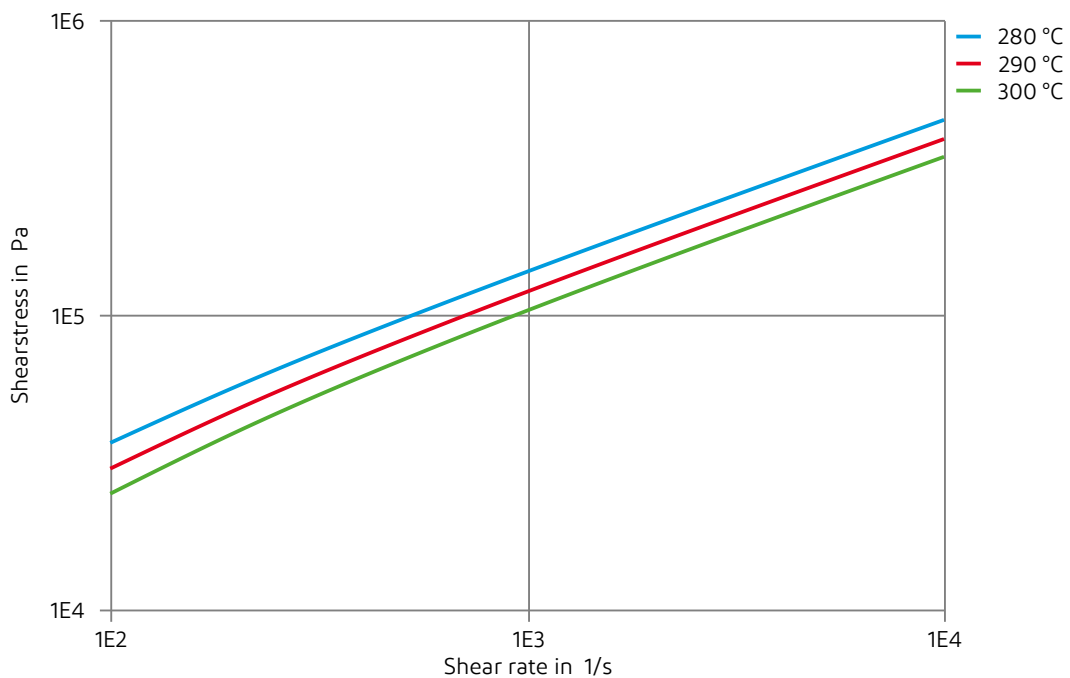

Rynite® 530HTE NC010

THERMOPLASTIC POLYESTER RESIN


Stress-strain
(measured on Rynite® 530 NC010)

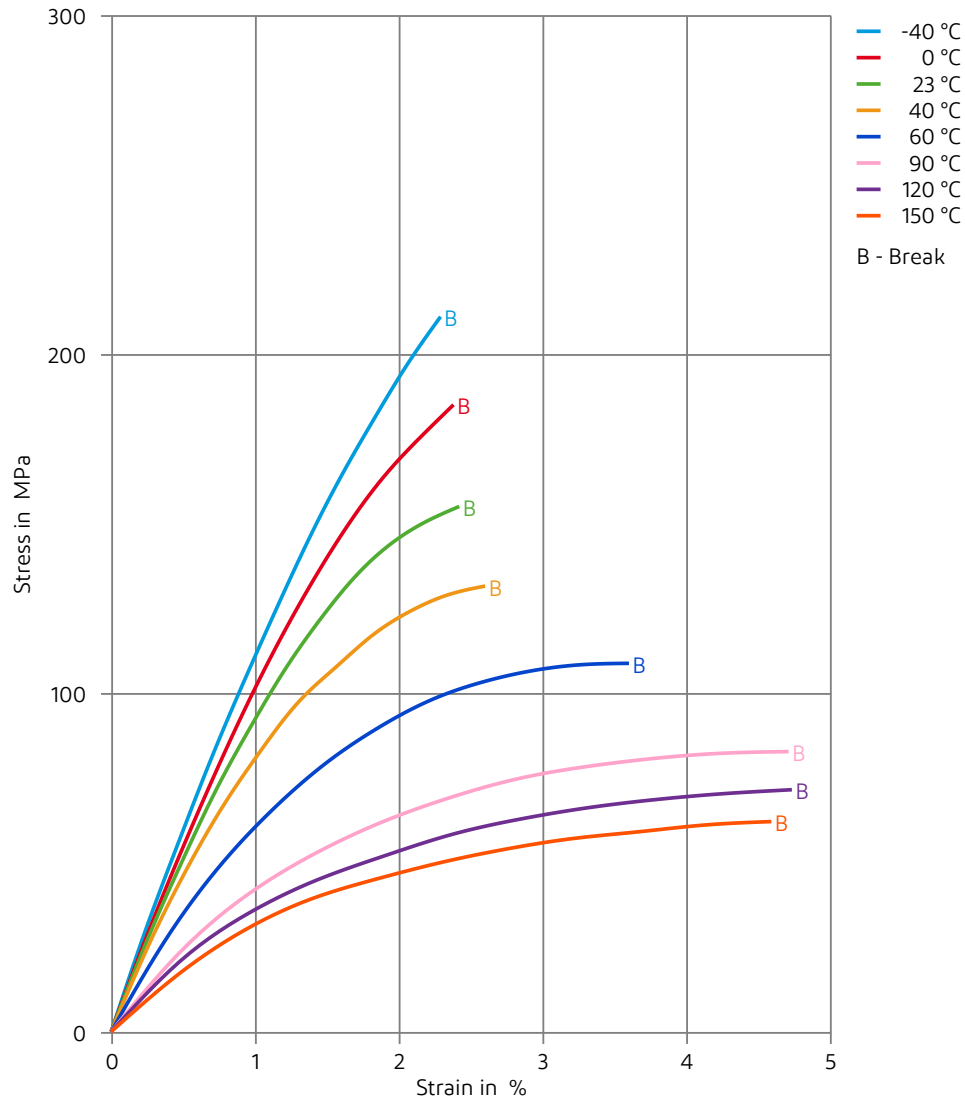

Rynite® 530HTE NC010

THERMOPLASTIC POLYESTER RESIN


Secant modulus-strain
(measured on Rynite® 530 NC010)

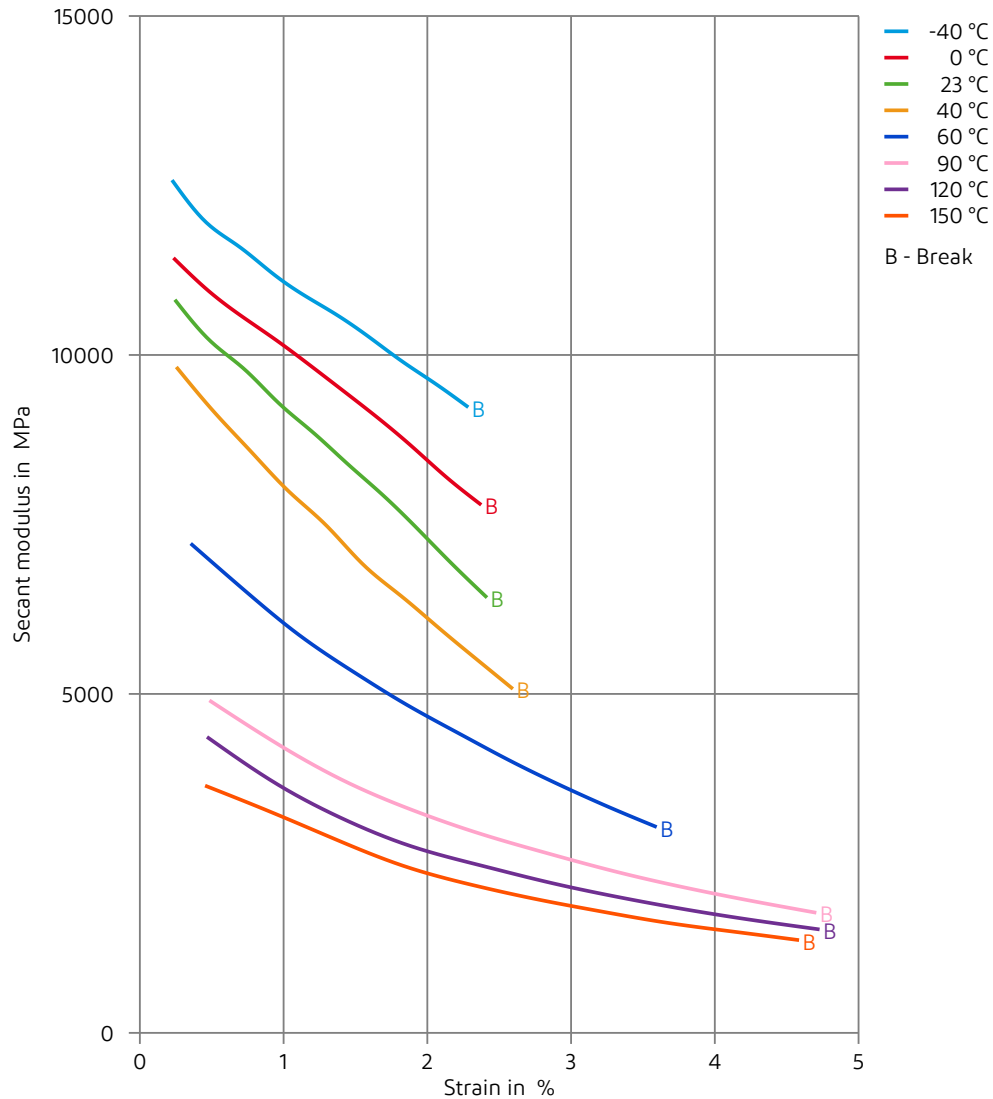

Rynite® 530HTE NC010

THERMOPLASTIC POLYESTER RESIN

Specific volume-temperature (pvT)

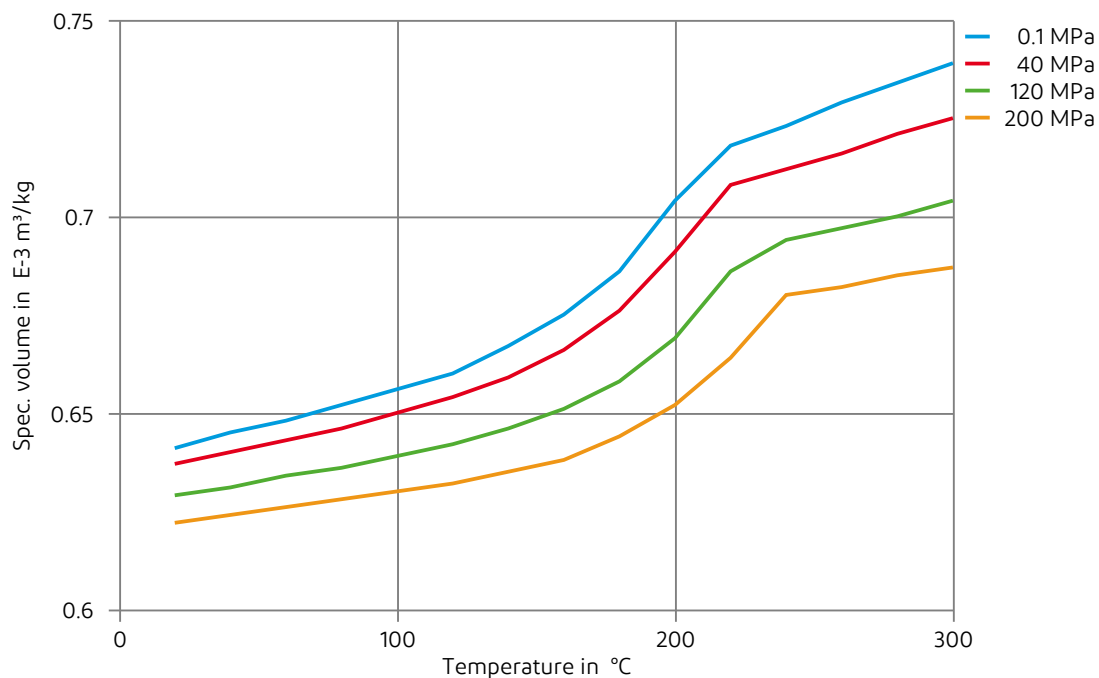

Mobility & Materials

The information set forth herein is furnished free of charge, is based on technical data that Celanese believes to be reliable, and represents typical values that fall within the normal range of properties. This information relates only to the specific material designated and may not be valid for such material used in combination with other materials or in other processes. It is intended for use by persons having technical skill, at their own discretion and risk. This information should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards and comply with applicable law. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.

CAUTION: Do not use Celanese materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless the material has been provided from Celanese under a written contract or other acknowledgement that is consistent with the Celanese policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your Celanese representative.

Celanese's sole warranty is that our products will meet our standard sales specifications in effect at the time of shipment. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, CELANESE SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR NON-INFRINGEMENT. CELANESE DISCLAIMS LIABILITY FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.