

Zytel® LC6200 BK385

NYLON RESIN

Zytel® LCPA long chain polyamide resins provide an innovative and growing portfolio of flexible polymers with excellent thermal, chemical, and hydrolysis resistance. The diverse selection of Zytel® LCPA grades is targeted for a range of performance characteristics, balancing temperature resistance, flexibility and low permeation.

Zytel® LC6200 BK385 is a toughened polyamide 612 resin for extrusion applications.

Product information

Resin Identification	PA612-HI	ISO 1043
Part Marking Code	>PA612-HI<	ISO 11469
ISO designation	ISO 16396-PA612-I,,M1CG1H,S18-010	

Rheological properties

	dry/cond.		
Melt mass-flow rate	12/*	g/10min	ISO 1133
Melt mass-flow rate, Temperature	250/*	°C	ISO 1133
Melt mass-flow rate, Load	10/*	kg	ISO 1133
Molding shrinkage, parallel	2.9/4.2	%	ISO 294-4, 2577
Molding shrinkage, normal	0.6/0.7	%	ISO 294-4, 2577
Molding shrinkage, parallel, annealed	4.4/*	%	ISO 294-4
Molding shrinkage, normal, annealed	0.85/*	%	ISO 294-4

Typical mechanical properties

	dry/cond.		
Tensile Modulus	1080/720	MPa	ISO 527-1/-2
Yield stress	32.2/29.2	MPa	ISO 527-1/-2
Yield strain	13/22	%	ISO 527-1/-2
Strain at break, 50mm/min	100/100	%	ISO 527-1/-2
Charpy notched impact strength, 73°F	40/80	kJ/m²	ISO 179/1eA
Charpy notched impact strength, -22°F	15/15	kJ/m²	ISO 179/1eA
Izod notched impact strength, 73°F	27/66	kJ/m²	ISO 180/1A
Izod notched impact strength, -22°F	13/13	kJ/m²	ISO 180/1A
Poisson's ratio	0.45/0.46		
Abrasion resistance	12/*	mm³	ISO 4649

Thermal properties

	dry/cond.		
Melting temperature, 18°F/min	218/*	°C	ISO 11357-1/-3
Temp. of deflection under load, 260 psi	46/*	°C	ISO 75-1/-2
Temp. of deflection under load, 65 psi	85/*	°C	ISO 75-1/-2
Thermal conductivity	0.37	W/(m K)	ISO 22007-2
Thermal conductivity of melt	0.17	W/(m K)	ISO 22007-2
Spec. heat capacity of melt	2690	J/(kg K)	
Spec. heat capacity solid	1660	J/(kg K)	
TGA curve	available		ISO 11359-1/-2

Zytel® LC6200 BK385

NYLON RESIN

Flammability

FMVSS Class	B	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	<80 mm/min	ISO 3795 (FMVSS 302)

Electrical properties

	dry/cond.		
Volume resistivity	>1E13/-	Ohm.m	IEC 62631-3-1
Surface resistivity	*/>1E15	Ohm	IEC 62631-3-2
Electric strength	34/-	kV/mm	IEC 60243-1

Other properties

	dry/cond.		
Humidity absorption, 80mil	0.7/*	%	Sim. to ISO 62
Density	1000/-	kg/m³	ISO 1183
Density of melt	820	kg/m³	

Extrusion

Drying Temperature	75 - 80 °C
Drying Time, Dehumidified Dryer	3 - 4 h
Processing Moisture Content	≤0.06 %
Melt Temperature Optimum	240 °C
Melt Temperature Range	235 - 250 °C

Additional information


Profile extrusion

POSTPROCESSING

Zytel® LC6200 BK385

NYLON RESIN


Viscosity-shear rate

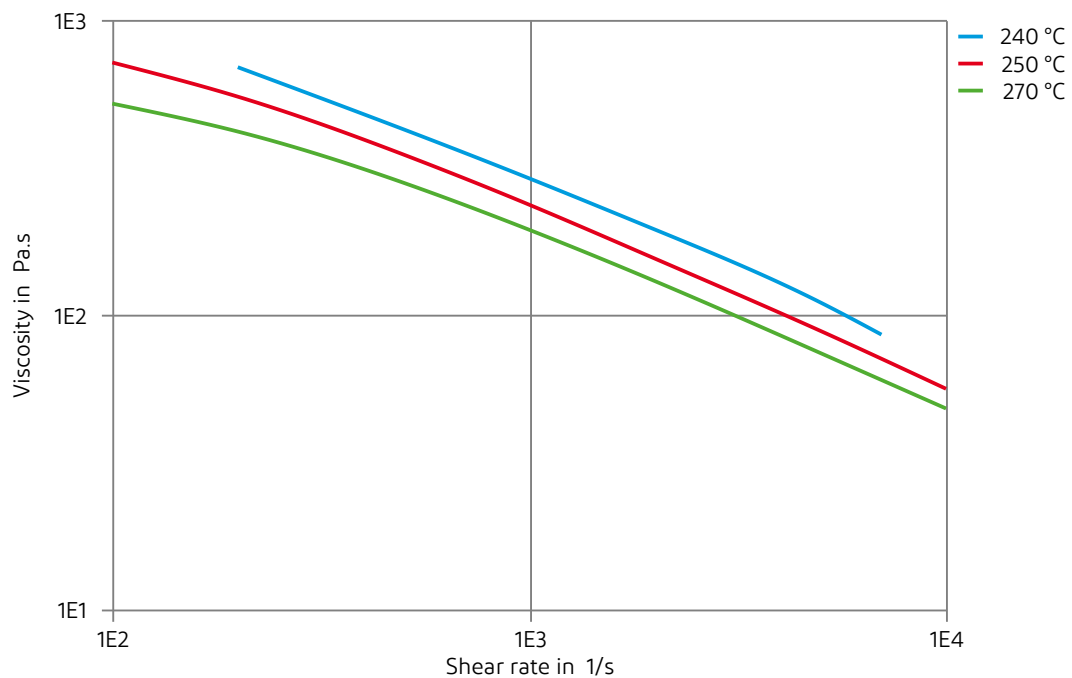

Zytel® LC6200 BK385

NYLON RESIN


Shearstress-shear rate

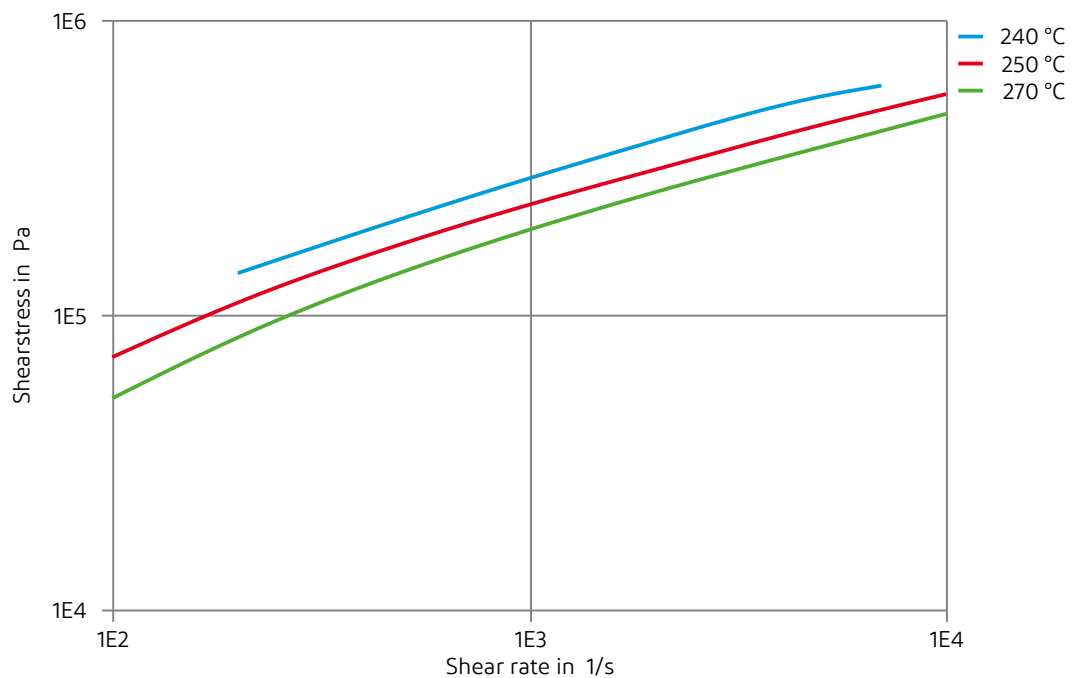

Zytel® LC6200 BK385

NYLON RESIN


Stress-strain (dry)

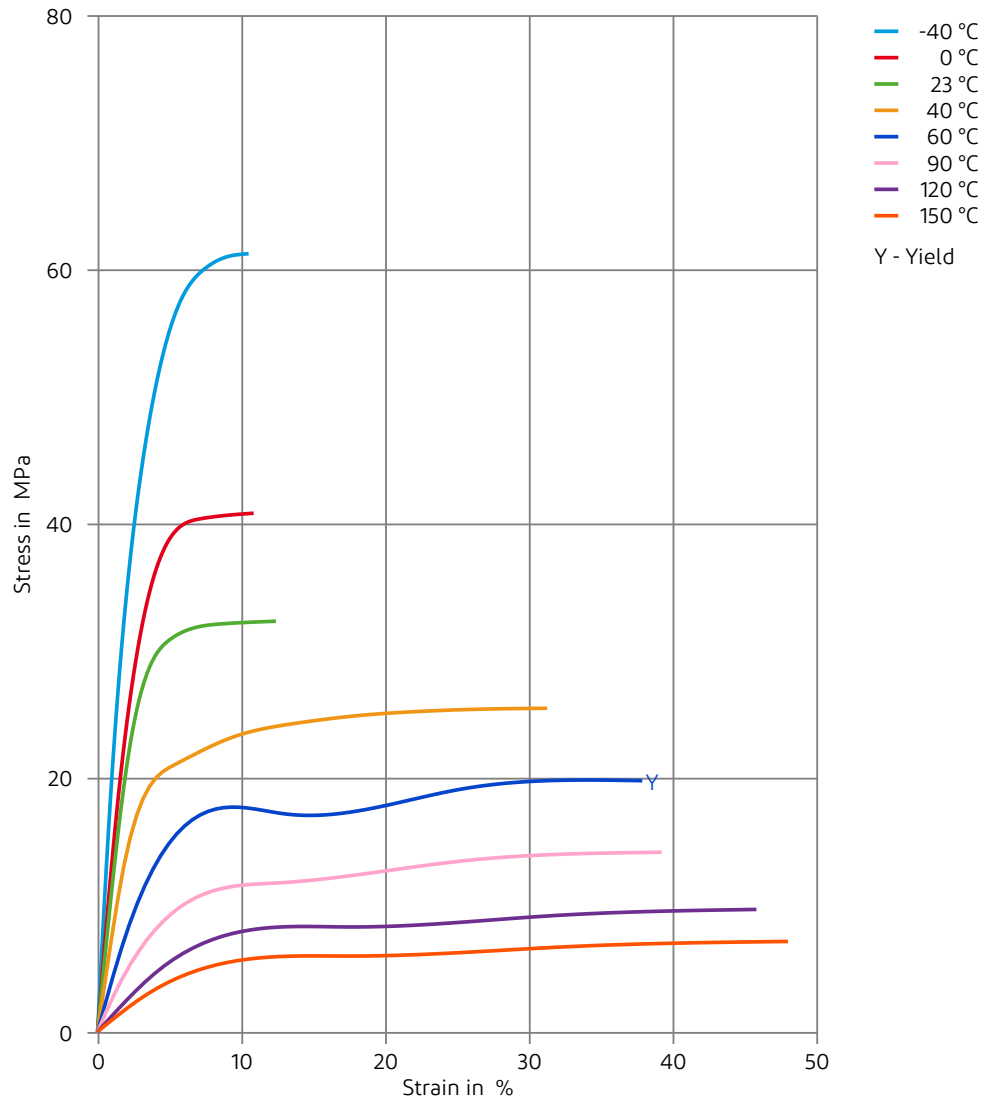

Zytel® LC6200 BK385

NYLON RESIN


Stress-strain (cond.)

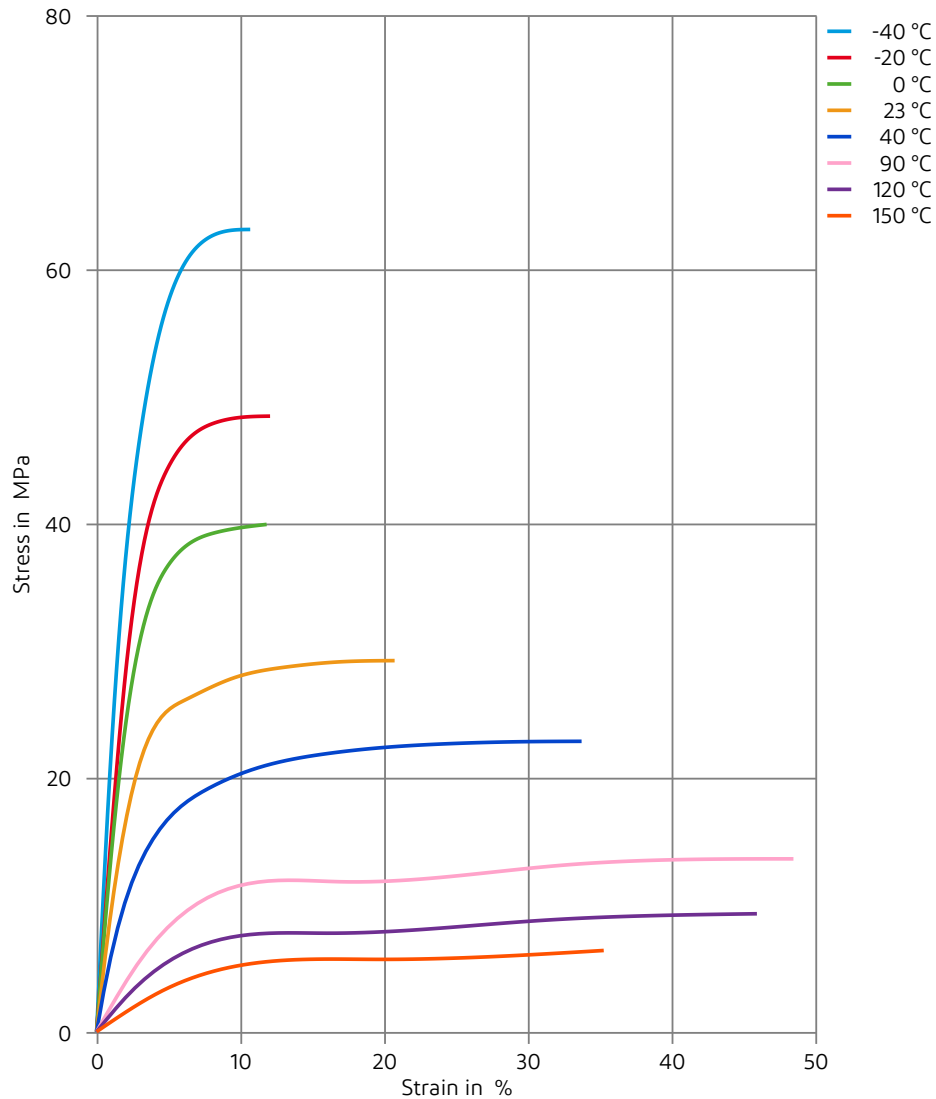

Zytel® LC6200 BK385

NYLON RESIN


Secant modulus-strain (dry)

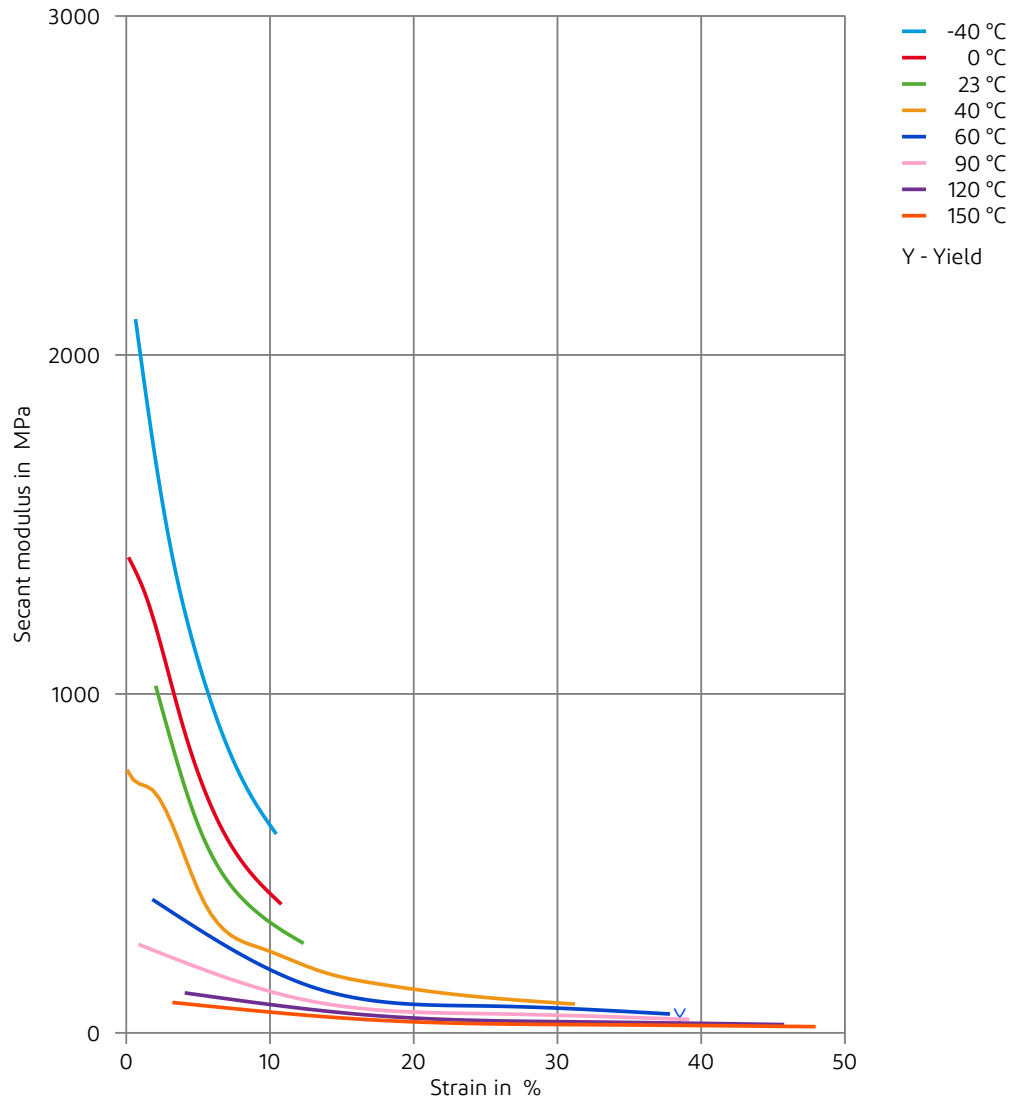

Zytel® LC6200 BK385

NYLON RESIN


Secant modulus-strain (cond.)

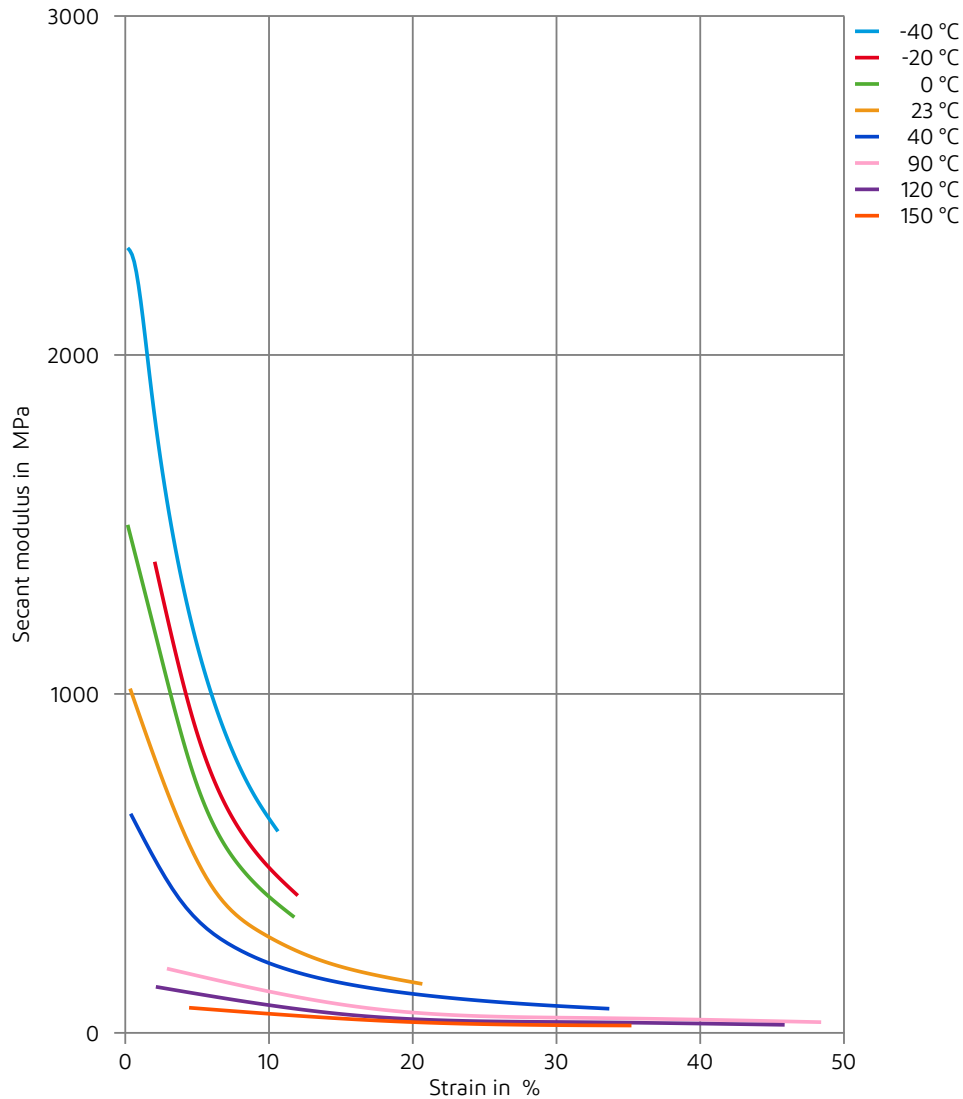

Zytel® LC6200 BK385

NYLON RESIN


Specific volume-temperature (pvT)

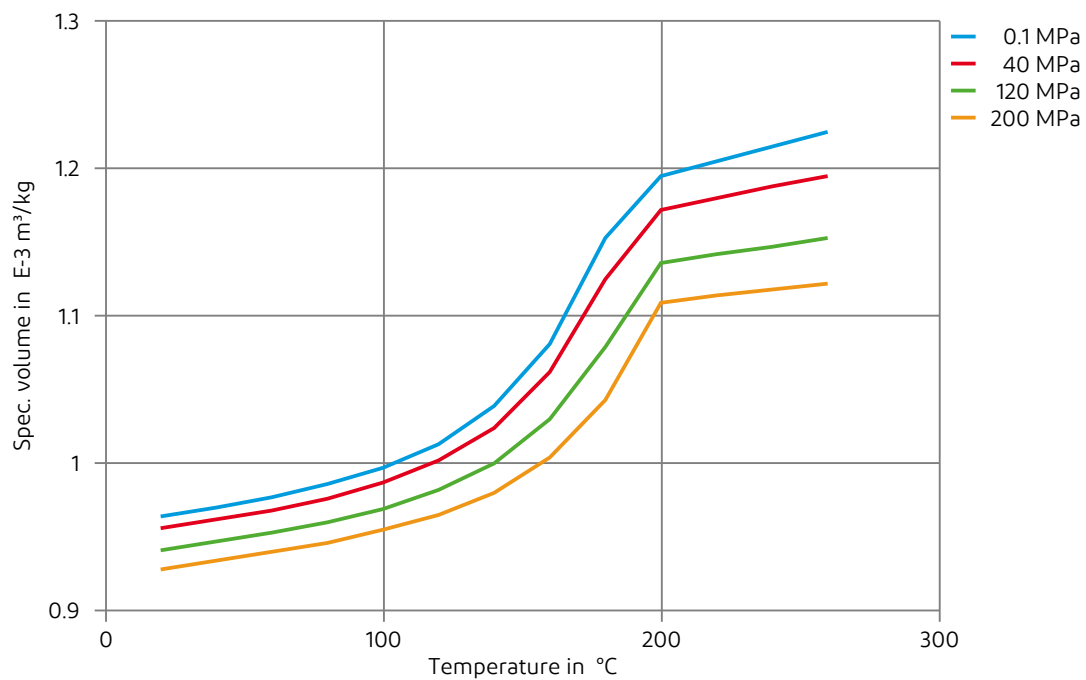

Zytel® LC6200 BK385

NYLON RESIN


Spec. enthalpy/mass-temp. (DSC)

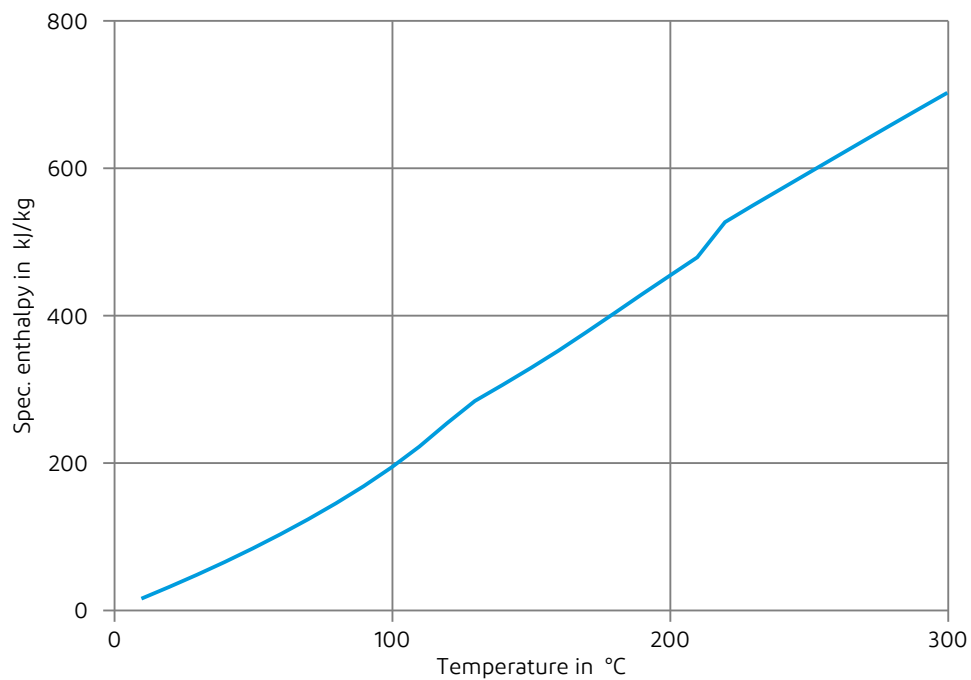

Zytel® LC6200 BK385

NYLON RESIN


Tensile modulus-temperature (dry)

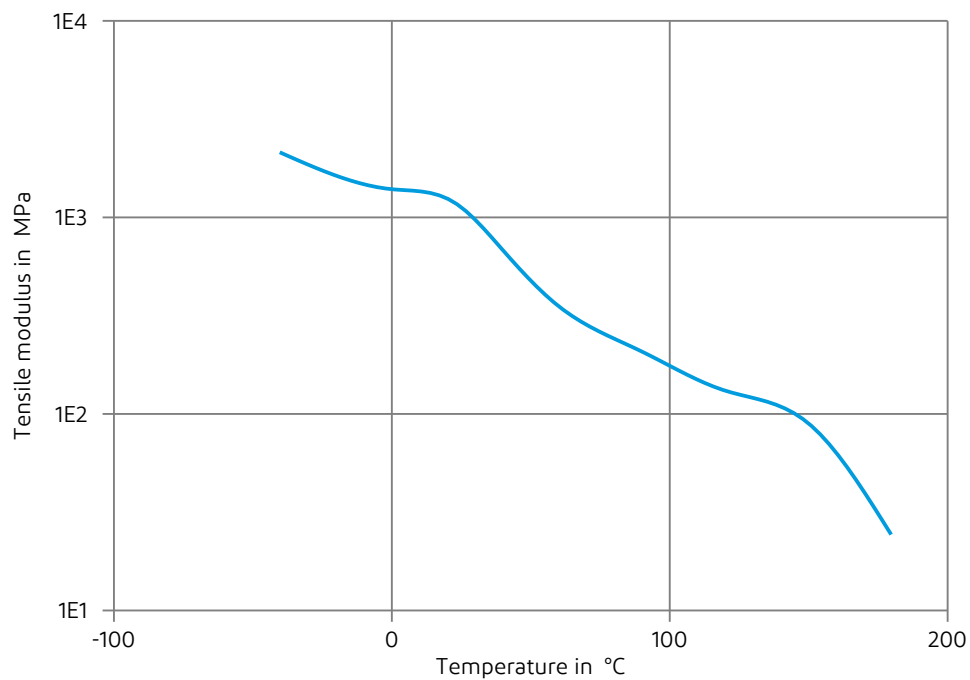

Zytel® LC6200 BK385

NYLON RESIN

Tensile modulus-temperature (cond.)

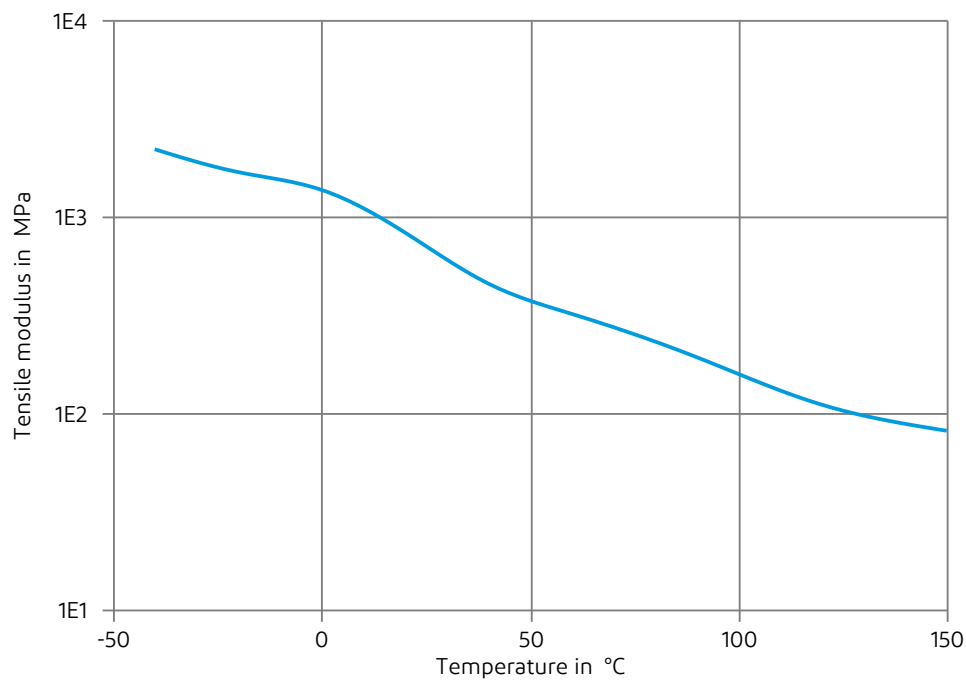

Zytel® LC6200 BK385

NYLON RESIN

Chemical Media Resistance

Other

- ✓ Urea solution (32.5% by mass), 23°C

Symbols used:

- ✓ possibly resistant
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
- ✗ not recommended - see explanation
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

Mobility & Materials

The information set forth herein is furnished free of charge, is based on technical data that Celanese believes to be reliable, and represents typical values that fall within the normal range of properties. This information relates only to the specific material designated and may not be valid for such material used in combination with other materials or in other processes. It is intended for use by persons having technical skill, at their own discretion and risk. This information should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards and comply with applicable law. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.

CAUTION: Do not use Celanese materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless the material has been provided from Celanese under a written contract or other acknowledgement that is consistent with the Celanese policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your Celanese representative.

Celanese's sole warranty is that our products will meet our standard sales specifications in effect at the time of shipment. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, CELANESE SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR NON-INFRINGEMENT. CELANESE DISCLAIMS LIABILITY FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.